

PRODUCT LINEUP: SPLIT

Wall Mounted
ECO Range
Compact & Comfort



Model: ASHG07LLCC / ASHG09LLCC / ASHG12LLCC





Wireless R.C.



Specifications


Model No.	Indoor unit		ASHG07LLCC	ASHG09LLCC	ASHG12LLCC
	Outdoor unit		AOHG07LLCC	AOHG09LLCC	AOHG12LLCC
Power Source	Single-phase, ~230V, 50Hz				
Capacity	Cooling	kW	2.0(0.9-2.8)	2.5(0.9-3.0)	3.4(0.9-3.8)
	Heating	kW	2.7(0.9-3.6)	3.0(0.9-3.8)	4.0(0.9-5.0)
Input Power	Cooling/Heating		0.470/0.620	0.730-0.740	1.080/1.130
EER	Cooling	W/W	4.26	3.42	3.15
	Heating	W/W	4.35	4.05	3.54
Pdesign	Cooling/Heating(-10°C)		2.0/2.2	2.5/2.3	3.4/3.2
SEER	Cooling	W/W	6.70	6.90	6.60
	Heating (Average)	W/W	4.00	4.00	3.80
Energy Efficiency Class	Cooling		A++	A++	A++
	Heating (Average)		A+	A+	A
Max. Operating Current	Cooling/Heating		6.0/7.5	6.0/7.5	6.5/9.0
Annual Energy Consumption	Cooling	kWh/a	104	127	180
	Heating	kWh/a	770	805	1,179
Moisture Removal			1.0	1.3	1.8
Sound Pressure Level	Indoor (Cooling)	H/M/L/Q	43/38/33/22	43/38/33/22	43/38/33/22
	Indoor (Heating)	H/M/L/Q	43/38/33/22	43/38/33/22	43/38/33/22
	Outdoor(Cooling/Heating)	High	47/48	47/48	50/51
Sound Power Level	Indoor(Cooling/Heating)	High	59/60	59/60	59/60
	Outdoor(Cooling/Heating)	High	61/61	61/61	65/65
	Indoor / Outdoor	High	720/1,670	720/1,670	720/1,830
Airflow Rate	Indoor / Outdoor	High	720/1,670	720/1,670	720/1,830
	Indoor	mm	262×820×206	262×820×206	262×820×206
Net Dimensions H x W x D	Indoor	kg(lbs)	7.0(15)	7.0(15)	7.0(15)
	Outdoor	mm	535×663×293	535×663×293	535×663×293
Weight	Indoor	kg(lbs)	24(53)	24(53)	26(57)
	Outdoor	kg(lbs)	24(53)	24(53)	26(57)
Connection Pipe Diameter (Liquid / Gas)			6.35/9.52	6.35/9.52	6.35/9.52
Drain hose Diameter (I.D./O.D.)			13.8/15.8 to 16.7	13.8/15.8 to 16.7	13.8/15.8 to 16.7
Max Pipe Length (Pre-Charge)			20(15)	20(15)	20(15)
Max Height Difference			15	15	15
Operation Range	Cooling	°CDB	-10 to 43	-10 to 43	-10 to 43
	Heating	°CDB	-15 to 24	-15 to 24	-15 to 24
Refrigerant	Type (Global Warming Potential)		R410A(2,088)	R410A(2,088)	R410A(2,088)
	Charge	kg(CO2eq-T)	0.65(1.4)	0.65(1.4)	0.85(1.8)

High efficient compact design

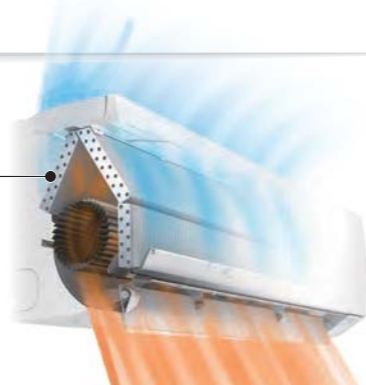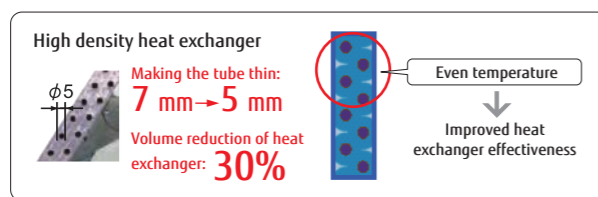


ON-OFF Programmable timer

You can set an integrated ON-OFF or OFF-ON timer suitable for your life style. (Setting time: 0.5, 1, 1.5, 2, 2.5, -----9.5, 10, 11, 12 hours)

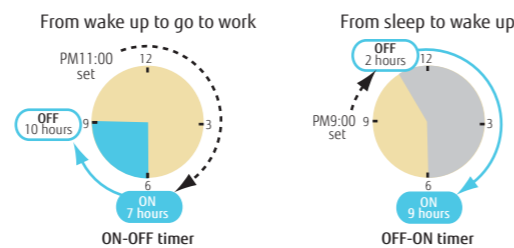


Powerful operation

20 minutes continuous operation by maximum airflow and maximum compressor speed is possible. Rapid cooling and heating makes the room comfortable quickly.

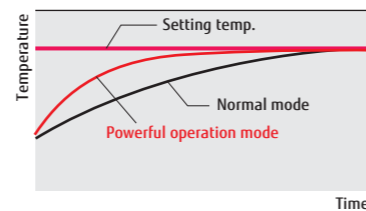


Economy operation

Setting temp. is shifted by 1°C automatically.

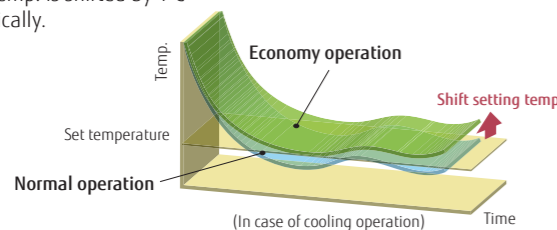

Low ambient operation

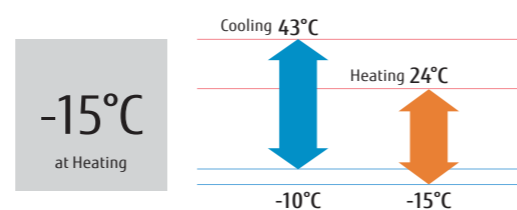

Optional parts

Remote Controller Holder: UTZ-RXLA

Dimensions

(Unit : mm)

